BEAM TEST of the ATLAS SILICON DETECTOR MODULES with BINARY READOUT in the CERN H8 BEAM in 1996[1]

F. Albiol[20], F. Ballester[20], G. Barbier[5], J. Bernabeu[20], R. Bonino[5], A. Ciocio[11], A.G. Clark[5], C. Couyoumtzelis[5], J. Dane[2], P. Demierre[5], J. DeWitt[1], D. E. Dorfan[1], T. Dubbs[1], J. Emes[11], D. Fasching[21], J. Fuster[20], C. Garcia[20], M.G.D. Gilchriese[11], J. Godlewski[9], S. Gonzalez[21], A. Grewal[16], A. A. Grillo[1], C. Haber[11], C. Hackett[2], P. Haesler[13], J.C. Hill[3], S. Holland[11], H. Iwasaki[8], Y. Iwata [7], R. Jared[21], S. Kashigin[1], I. Kipnis[11], U. Koetz[4], T. Kondo[8], R. Kowalewski[5], W. Kroeger[1], A.Lankford[2], J. Lozano Bahilo[11], G. Moorhead[13], D. Morgan[18], D.J. Munday[3], W. Murray [4,17], R. Nickerson[16], T. Ohsugi [7], V. O'Shea[6], E. Perrin[5], S. Pier[2], P.W. Phillips[17], T. Pulliam[1], J. Richardson[12], W. A. Rowe[1], A. Saavedra[19], H. F.-W. Sadrozinski[1], J. Salt[20], J. Sanchez [20], B. Schmid[2], A. Seiden[1], P.J. Sellin[18], M. Shapiro[11], J. Siegrist[11], E. Spencer[1], H. Spieler[11], S. Stapnes[14], R. Takashima[10],N. Tamura[15], G. Taylor[13], S. Terada[8], Y. Unno[8], B.Vuaridel[5], S.M. Walsh [18], R. Wastie[16], M.Weber[5], A. Webster[1], R.Wichmann[1], M. Wilder [1].

[1] SCIPP, Univ. of California, Santa Cruz, CA, USA, [2] Univ. of California, Irvine, CA, USA
[3] Cavendish Laboratory, Univ. of Cambridge, Cambridge, UK, [4] CERN, Geneva, Switzerland
[5] Univ. of Geneva, Geneva, Switzerland, [6] Univ. of Glasgow, Glasgow, UK, [7] Hiroshima Univ., Hiroshima, Japan,
[8] KEK, Tsukuba, Japan, [9] INP, Krakow, Poland, [10] Kyoto Univ. of Education, Kyoto, Japan,
[11] Lawrence Berkeley National Laboratory, Berkeley, CA, USA, [12] Univ. of Liverpool, Liverpool, UK,
[13] Univ. of Melbourne, Melbourne, Australia, [14] Univ. of Oslo, Oslo, Norway, [15] Okayama Univ., Okayama, Japan,
[16] Univ. of Oxford, Oxford, UK, [17] Rutherford Appleton Laboratory, Chilton, UK, [18] Univ. of Sheffield, Sheffield, UK,
[19] Univ. of Sydney, Sydney, Australia, [20] IFIC, CSIC-Univ. of Valencia, Valencia, Spain,
[21] Univ. of Wisconsin, Madison, WI, USA

ABSTRACT

Results are reported from a beam test of prototype silicon micro strip detectors and front-end electronics designed for use at the LHC. The detector assemblies were 12 cm long and were read out with binary electronics. Both irradiated and unirradiated assemblies were measured in a 1.56T magnetic field for efficiency, noise occupancy, and resolution as a function of bias voltage, binary hit threshold, and detector rotation angle with respect to the beam direction. Measurements were also performed at a particle flux comparable to the one expected at the LHC.

I. INTRODUCTION

ATLAS is a large general purpose magnetic spectrometer planned for use at the CERN Large Hadron Collider (LHC) [1]. The Semiconductor Tracker (SCT) [2] will be placed between radii of 30 cm and 54 cm from the LHC interaction point. The basic specifications for this tracker include a response time of 25ns (40MHz) to match the LHC collision frequency, operation after a fluence of $10^{14}/cm^2$ MIP equivalent irradiation, and a point resolution of about 20µm. The solution adopted by ATLAS is to use single-sided strip detectors glued back-to-back to form an effective double-sided detector with small angle stereo readout. Readout will be AC-coupled from n-type implant strips in n-bulk crystals. After radiation induced type inversion of the bulk and increased depletion voltage [3], the junctions will be at the n-strips allowing the possibility of operation under partial depletion of the silicon. The readout electronics [4] employs a 1 bit binary scheme whereby only hits above a single threshold are recorded. In such a scheme the required resolution is achieved with 75µm pitch detectors. Noise occupancy must be well below 10^{-3} not to exceed the bandwidth of the data transmission system. A key performance requirement of such a system is to maintain high tracking efficiency at low noise occupancy.

The present work builds on a series of previous beam tests and experience with binary readout electronics [5-8]. In this paper a report is given of measurements made during the Summer of 1996 in the CERN H8 beam line. In this data set, detectors and electronics designed to meet the ATLAS specifications described above were used. Both irradiated and unirradiated detectors and electronics were employed. These components were operated at -10^{o}C in a 1.56T magnetic field. Measurements were made at various silicon bias voltages and at rotation angles between +27 and -12 degrees with respect to the beam line, in excess of the crossing angles expected at ATLAS [9].

II. EXPERIMENTAL SET-UP

Figure 1 shows the overall layout of the experimental setup. The devices under test (DUT also referred to as "modules") were denoted ATT7 (irradiated) and ATT8 (unirradiated) and were placed with their strips vertical in a combined shielding and cooling box which could be rotated about the direction of the vertical magnetic field of the dipole magnet "Mopurgo". Beam particles were tracked by two independent systems. One was a beam telescope (T1-T4), consisting of silicon strip detectors with 50µm pitch and slow analog electronics, capable of locating track positions in the DUTs to 2µm [10]. The other was a pair of two-sided binary readout planes (LBIC2, LBIC1) with 75µm pitch, These were mounted in the shielding box and used as anchor planes to allow independent albeit coarser resolution tracking. Both systems were used off-line for various phases of the analysis.

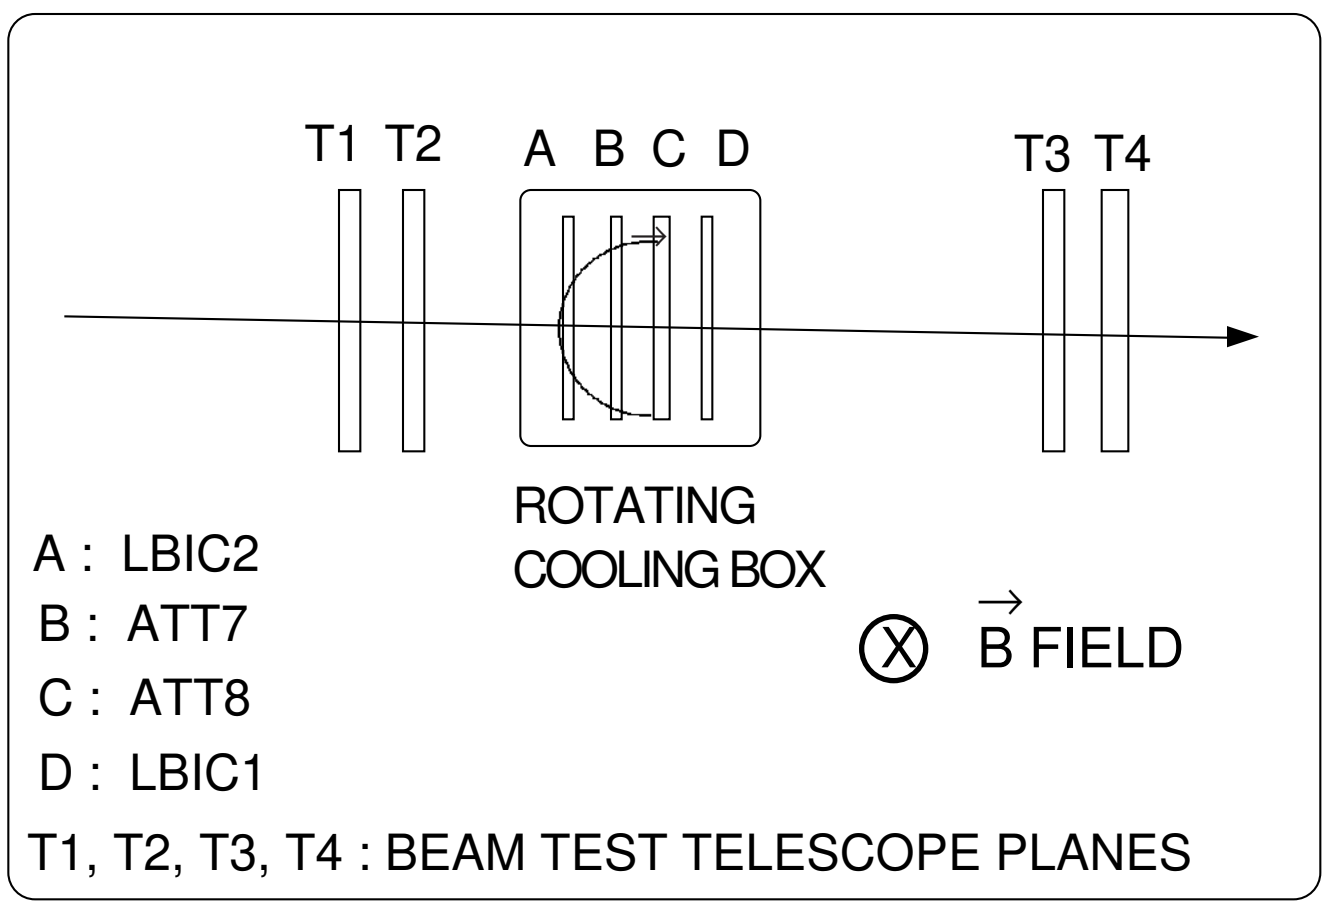

Fig. 1 Top view of the experimental set-up in the 1.56T magnet

The DUTs were geometrically and mechanically identical and were constructed as follows. Each module was single sided and consisted of a pair of 6cm x 6cm, n-strip in n-bulk, AC-coupled detectors with 75µm pitch readout. The strips were isolated by a continuos p-frame. The detectors were manufactured by Hamamatsu Photonics. The two detectors were butt-joined end-to-end and wire bonded to form a 12cm active strip. The backsides were biased negative and the n-type implants were held at ground. The front-end electronics (FEE) was mounted on a ceramic hybrid which was glued directly upon the silicon, close to the butt joint. Wire bonds were made from the hybrid to pads near the middle of the 12 cm active strip. The FEE consisted of a two chip set. The first chip, CAFE [11], was a bipolar preamp, shaper, and discriminator. The second chip, CDP128 [12], was a 1 bit binary pipeline clocked at 40 MHz, which stored the hit bit from the CAFE at a time corresponding to a beam trigger recorded by the experiment. The CAFE output showed a hit if the pulse height in the detector exceeded the externally controllable analog threshold applied to the CAFE discriminator. The procedure employed in these measurements was to scan this threshold at each of the operating conditions (bias and detector angle). A typical threshold region for high efficiency was around 1.0-1.4fC equivalent input charge.

The ATT8 module was unirradiated and had a depletion voltage of 70 V. The ATT7 module was uniformly irradiated to a fluence of 10^{14} equivalent high energy protons/cm^2. The irradiation was performed at the 88" Cyclotron at Lawrence Berkeley National Laboratory. The hybrid with powered FEE and the detectors were irradiated separately and then assembled into a module. The irradiated detectors underwent type inversion [3]. Given the temperature dependence of the annealing effects [13,14] the detectors were kept near -20 C except for short periods. A capacitance versus bias voltage (C-V) measurement performed 10 weeks after the end of the beam test determined the depletion voltage to be 290±10V. Correcting for annealing during warm-up periods implies that the depletion voltage of ATT7 was in excess of 300V during the beam test.

III. DATA ANALYSIS

The analysis identified tracks in the beam telescope or the anchor planes, predicted their locations in the DUTs, and correlated found hits with tracks. Events with more than one track found were eliminated. The efficiency was defined as the ratio of tracks with a match in the DUT to all tracks. Depending on the track definition, different cuts were employed: for tracks found in the telescope (anchors), a match was found if the predicted position of the track agreed with a hit within ± 60µm (±2strips). The noise performance of the detectors was characterized by the "off-track occupancy", which was the number of hits outside of 500µm of a track, divided by the total number of strips. In addition, the occupancy associated with noisy channels was determined with beam-off data.

IV. RESULTS

A. Bias Dependence of the Response

In order to determine the operating conditions of the detectors, bias voltage scans were performed with no applied magnetic field and at zero rotation angle. By varying the threshold to the CAFE chip, both the efficiency and median pulse height of the signal could be measured. The latter corresponds to the threshold which results in a 50% hit finding efficiency. Figure 2 shows the efficiency for the unirradiated module, ATT8, for thresholds of 1.0 and 1.2fC. We find, as in previous tests [7], that the unirradiated n-strip in n-bulk detectors require an over-bias to achieve high efficiency. In later measurements, ATT8 was operated at 125V which is still not fully efficient at 1.2fC. Previous studies [15] indicated an optimum bias in excess of 150V to minimize inter strip capacitance and noise.

At the time of the beam test, the depletion voltage of the irradiated module, ATT7, had not yet been determined by the C-V characteristic. The depletion voltage was underestimated. Bias voltage scans, shown in Figure 2, were done up to 275V, still short of the 300V depletion point. At 275V bias the efficiency approaches 100%. In later measurements, this module was operated at 250V bias where inefficiencies would be expected for 1.4fC and above. Figure

2 also confirms an effect seen in earlier work [6,7,16], that at half depletion voltage (150V), the efficiency of the irradiated detector is still above 95%.

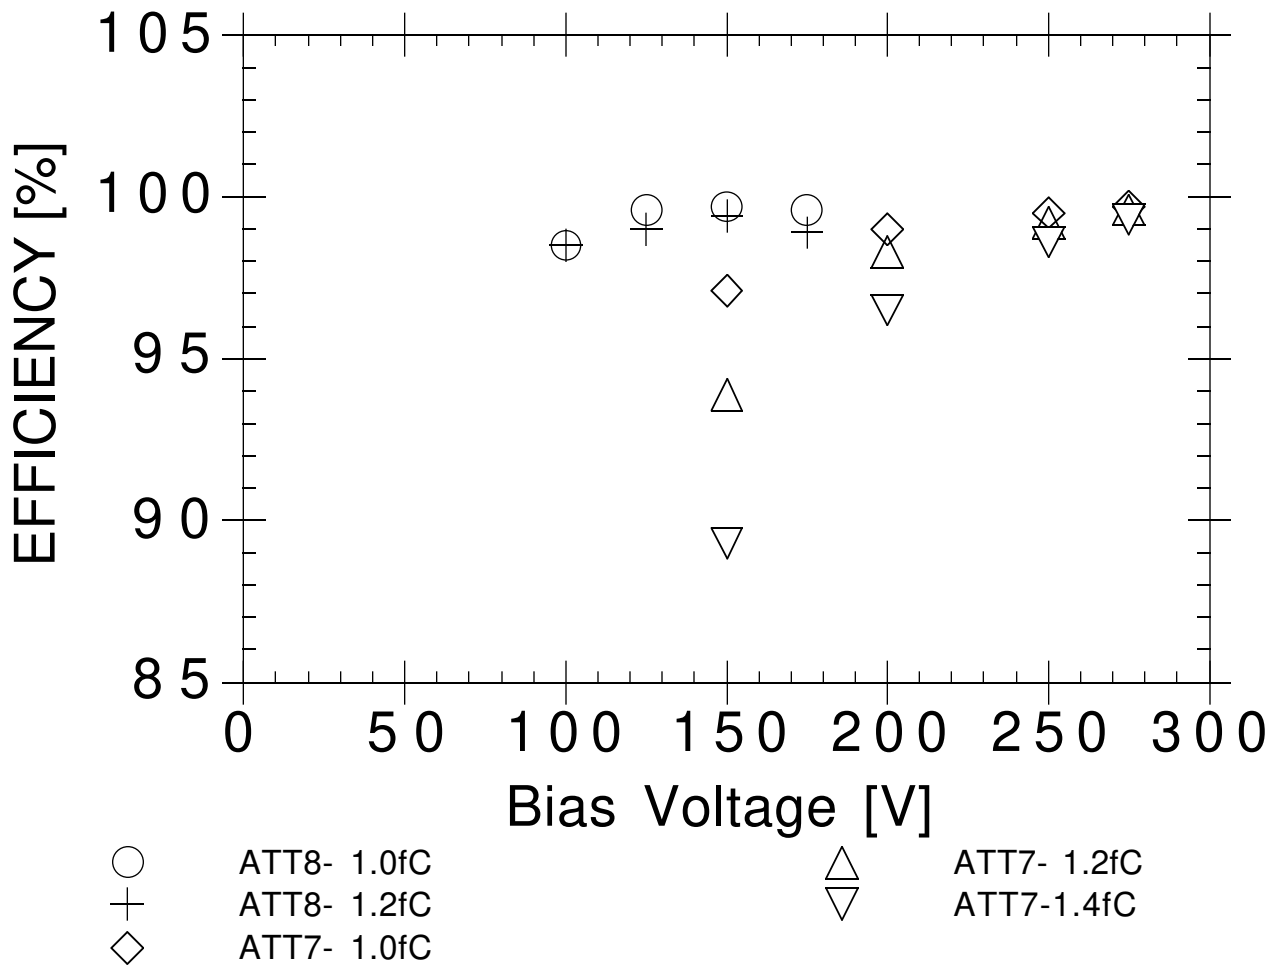

Fig. 2 Efficiency of ATT8 (unirradiated) and ATT7 (irradiated) as a function of bias voltage, for V_{th}=1.0, 1.2, 1.4fC.

The binary readout does not yield the pulse height directly. As a measure of it, the "median pulse height", i.e. the threshold giving 50% efficiency is extracted from threshold curves. In Fig. 3, the median pulse height is shown for both unirradiated and irradiated modules as a function of the bias voltage.

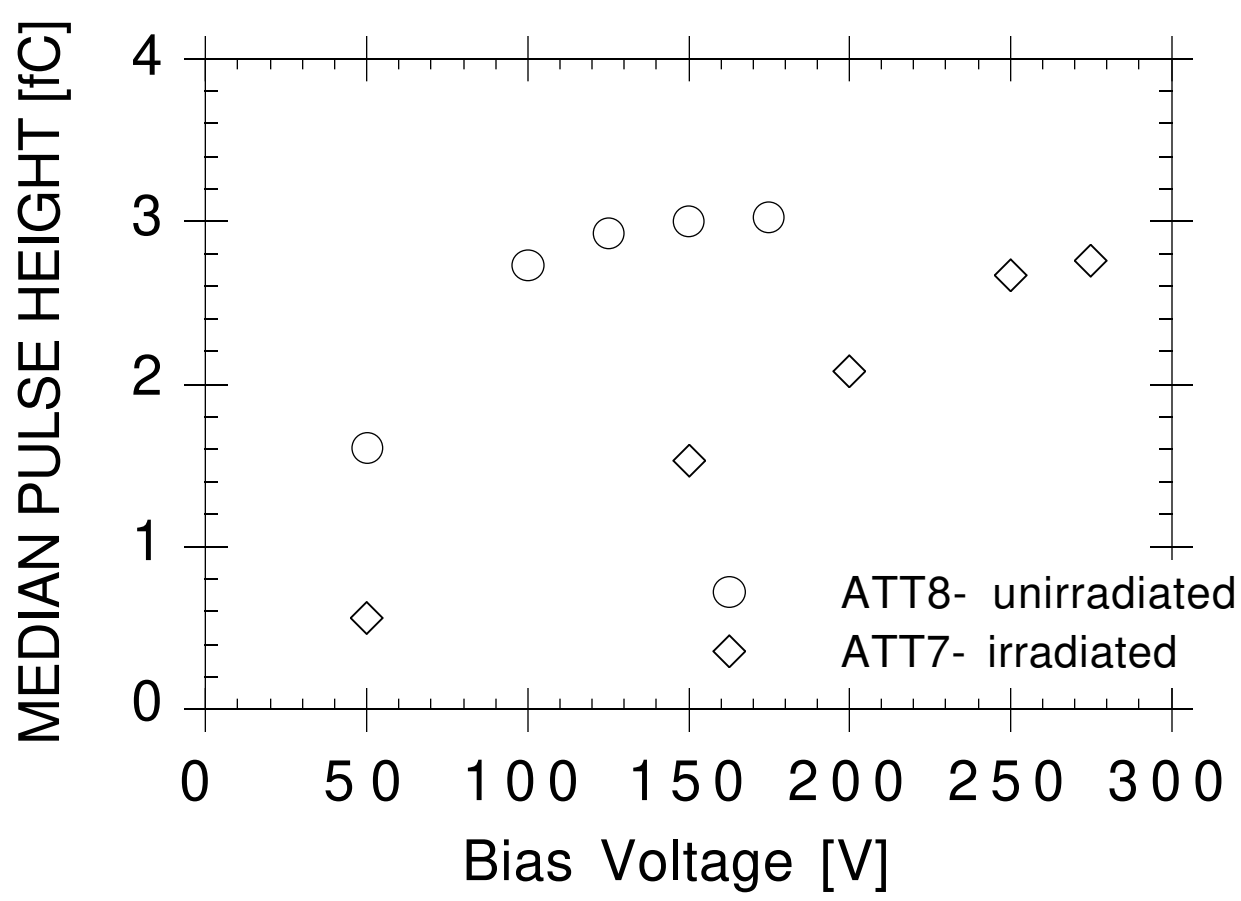

Fig. 3 Median pulse height of ATT7 and ATT8 as a function of bias voltage.

The absolute pulse height scale is known for both modules to about 10%. The unirradiated module shows a plateau in the pulse height above 150V. For the irradiated module, the pulse height is still rising at 275V, a confirmation of the subsequent C-V measurement mentioned in Sec. II. At 150V the median pulse height is 50% of the unirradiated value. In the following, ATT8 was biased at 125V which results in a small signal loss and ATT7 was biased at 250V, at about 80% of the full depletion voltage.

B. *Efficiency and Noise Occupancy*

The parameters which have direct application in tracking programs are position resolution, efficiency and noise occupancy. They can be determined in threshold scans for the different modules. Fig. 4 shows both the efficiency and noise occupancy as a function of the applied threshold voltage in mV for ATT8 for 12 degrees rotation in the magnetic field; 90mV corresponds to 1fC.

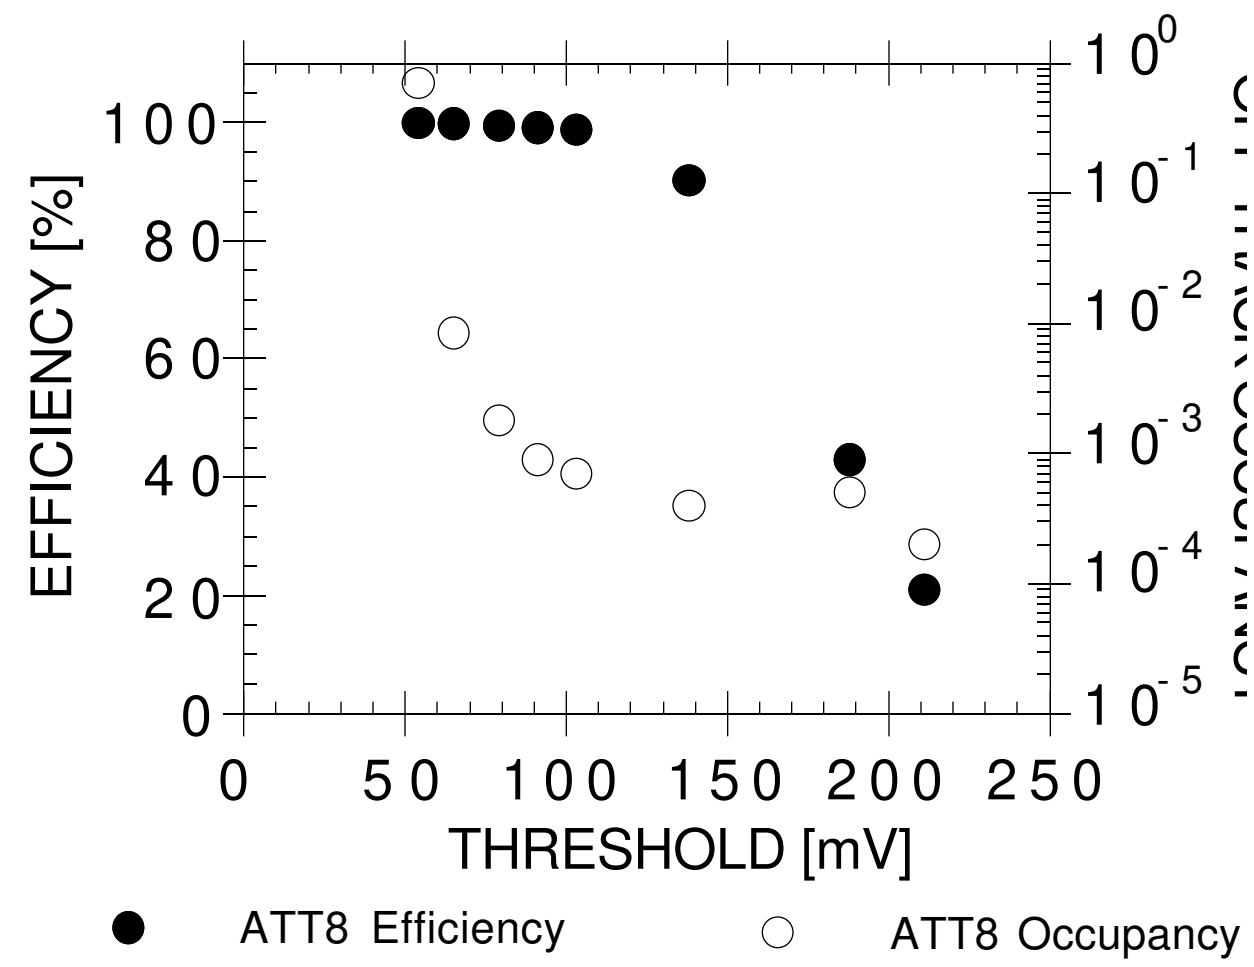

Fig. 4 Efficiency and noise occupancy vs. threshold for ATT8 .

The efficiency and noise occupancy for the irradiated module ATT7 for the same conditions is shown in Fig. 5 . Here the 1fC point is at 80mV.

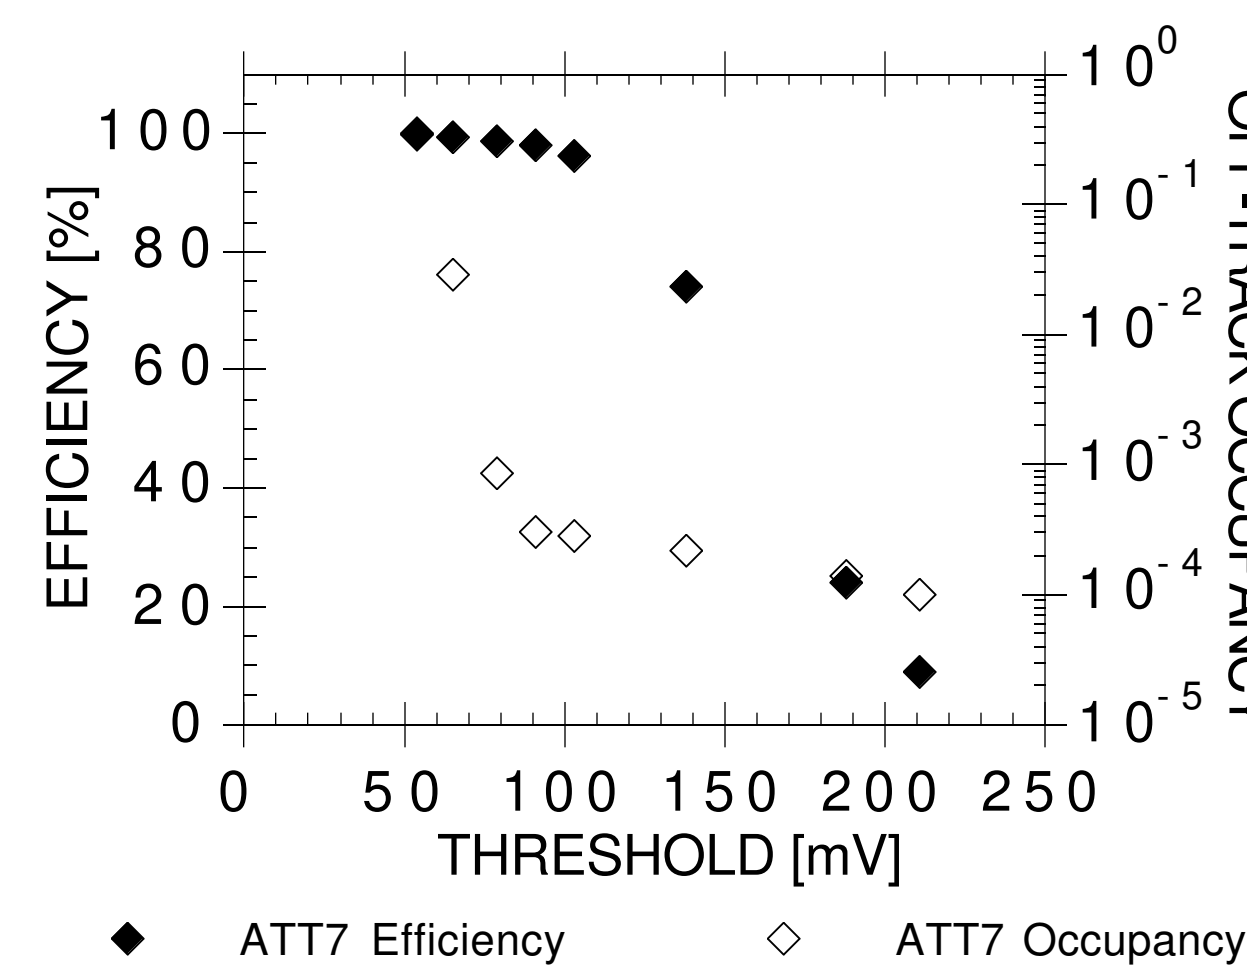

Fig. 5 Efficiency and noise occupancy vs. threshold for ATT7.

The difference in the threshold scale of the two modules is due to the CAFE chips used which come from different fabrication runs respectively. The efficiency and noise occupancy curves, Figs. 4 and 5, suggest that operation with a threshold between 0.8fC and 1.2fC is possible with large enough noise suppression and efficiency. Correlation of hit locations in the different modules indicates that part of the noise at larger thresholds is associated with an additional track, missed in the original track finding.

In order to compare this data with results from previous beam tests, the efficiency versus noise occupancy of the modules is shown in Fig. 6 for tracks at normal incidence without magnetic field for an applied threshold of 1fC. (Note that the CMOS pipeline chip CDP128 is level sensing, while the future ATLAS chip ABC will be edge sensing. In order to compare the occupancy with the ATLAS requirements, the occupancy numbers have been normalized by the width in clock cycles of the comparator output pulse. The occupancy numbers have been scaled by a factor of 0.4 for the CAFE chip and 1.67 for the low-power LBIC [17] chip respectively, given the width of the comparator output pulses of 2.5 for CAFE and 0.6 for LBIC. Good efficiency is attained at noise occupancies of close to 10^{-4}.

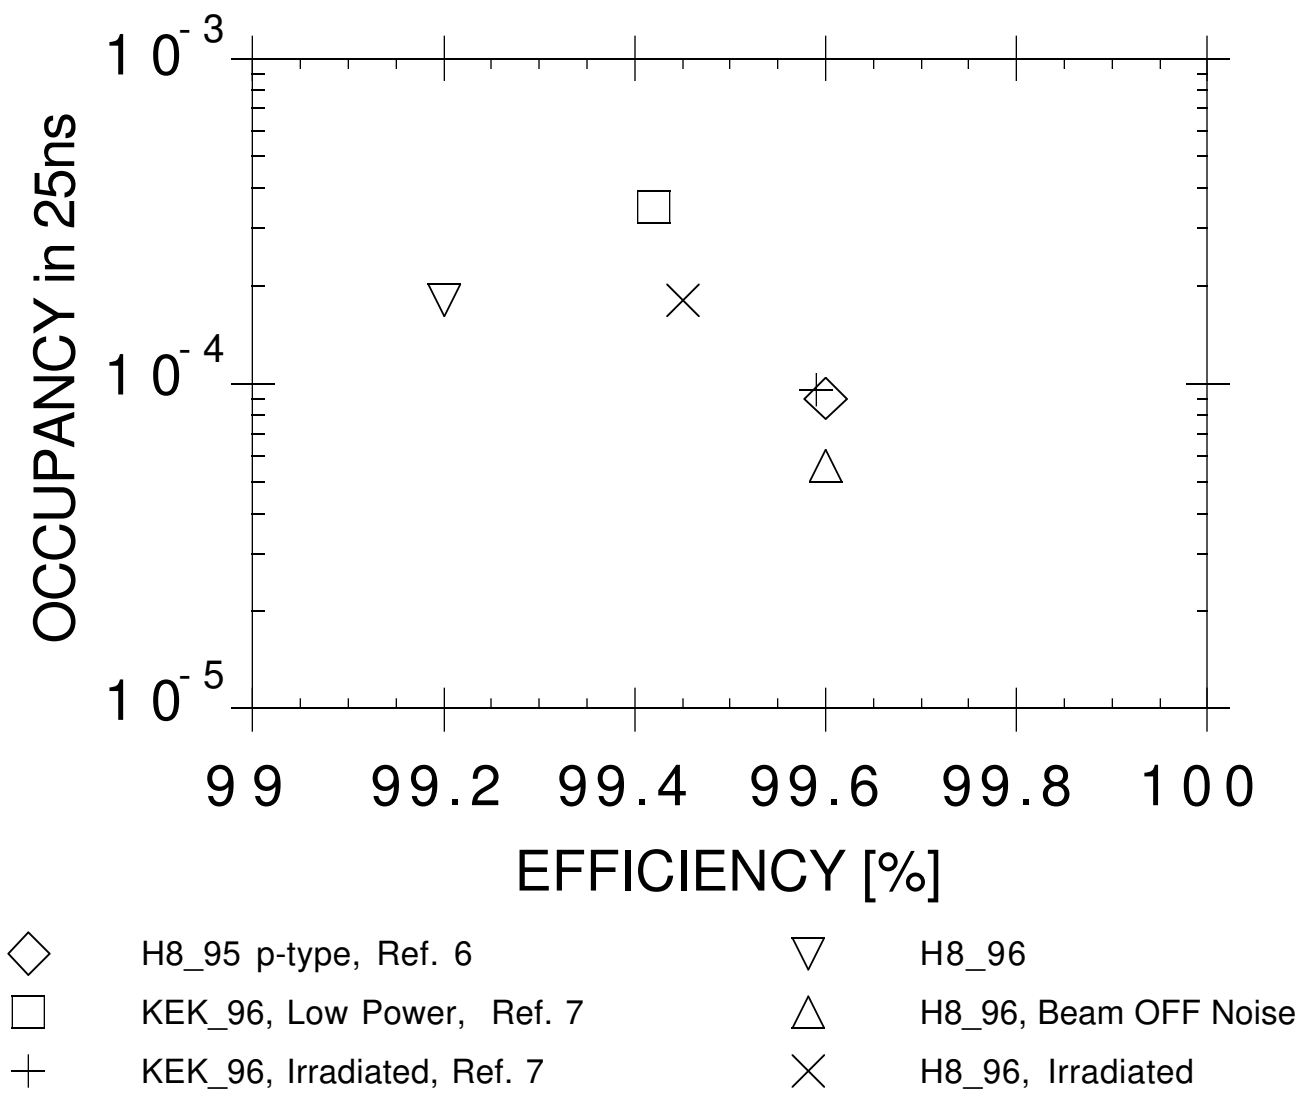

Fig. 6 Noise occupancy vs. efficiency at 1fC threshold for ATT8 and ATT7 for tracks at normal incidence without magnetic field in comparison to previous beam test data.

With beam on, the observed occupancies are increased due to some unreconstructed tracks present in the events. These cause the occupancy to level off at 1fC threshold, as mentioned above in the discussion of Figs. 4 and 5. The highest occupancy is shown by an unirradiated detector tested at KEK [7] which was read out with the lower power FEE LBIC exhibiting higher intrinsic noise than the CAFE. For the unirradiated module in this data set, (ATT8), two points are shown. One, labeled H8_96, is calculated using the beam telescope and the off-track occupancy, the other, labeled H8_96 Beam OFF Noise, uses tracks reconstructed in the binary anchor planes only and takes the noise occupancy from special noise runs without beam, which reflects the true noise performance of the detectors. Both techniques give efficiencies in excess of 99 %.

C. Rotation in the Magnetic Field

The ATLAS silicon tracker will be operated in an axial magnetic field of 2T. If the detectors are rotated by the Lorentz angle relative to the radial direction, the effective crossing angle at the edges of the 6cm wide modules located at 30cm radius will be ±15degree for 1GeV particles[9]. Thus the Lorentz angle has to be determined and the response of the detector for particles crossing with angles up to ±15degrees relative to that direction has to be measured. Based on the measurements of Ref. 5 in a 1T field, a Lorentz angle of +12degrees was expected in this experiment. The detectors were rotated in several steps from -12 to +27 degrees.

In order to measure the efficiency as a function of the inter-strip position, the high resolution telescope was used. At crossing angles greater than 15degrees, tracks always cross two or more strips. As shown previously [6], a measurement of the efficiency as a function of the normalized inter-strip position η affords higher sensitivity to inefficiencies associated either with higher threshold or with rotation from normal incidence. The efficiency decreases first in the region where the generated charge is shared between strips, i.e. at the edge of the strips (the "crack"). This is shown in Fig 7, where the efficiency of ATT8 and ATT7 are shown as a function of η for 2fC threshold for three rotation angles in the magnetic field: for 12 degrees, close to the Lorentz angle, where the charge sharing is minimal, for -3 and for 27 degrees, where it is maximal. The loss in efficiency is visible in the region of the crack (η=0.5). While this area is fairly narrow for 12 degree rotation, it is much wider for rotations away from the Lorentz angle.

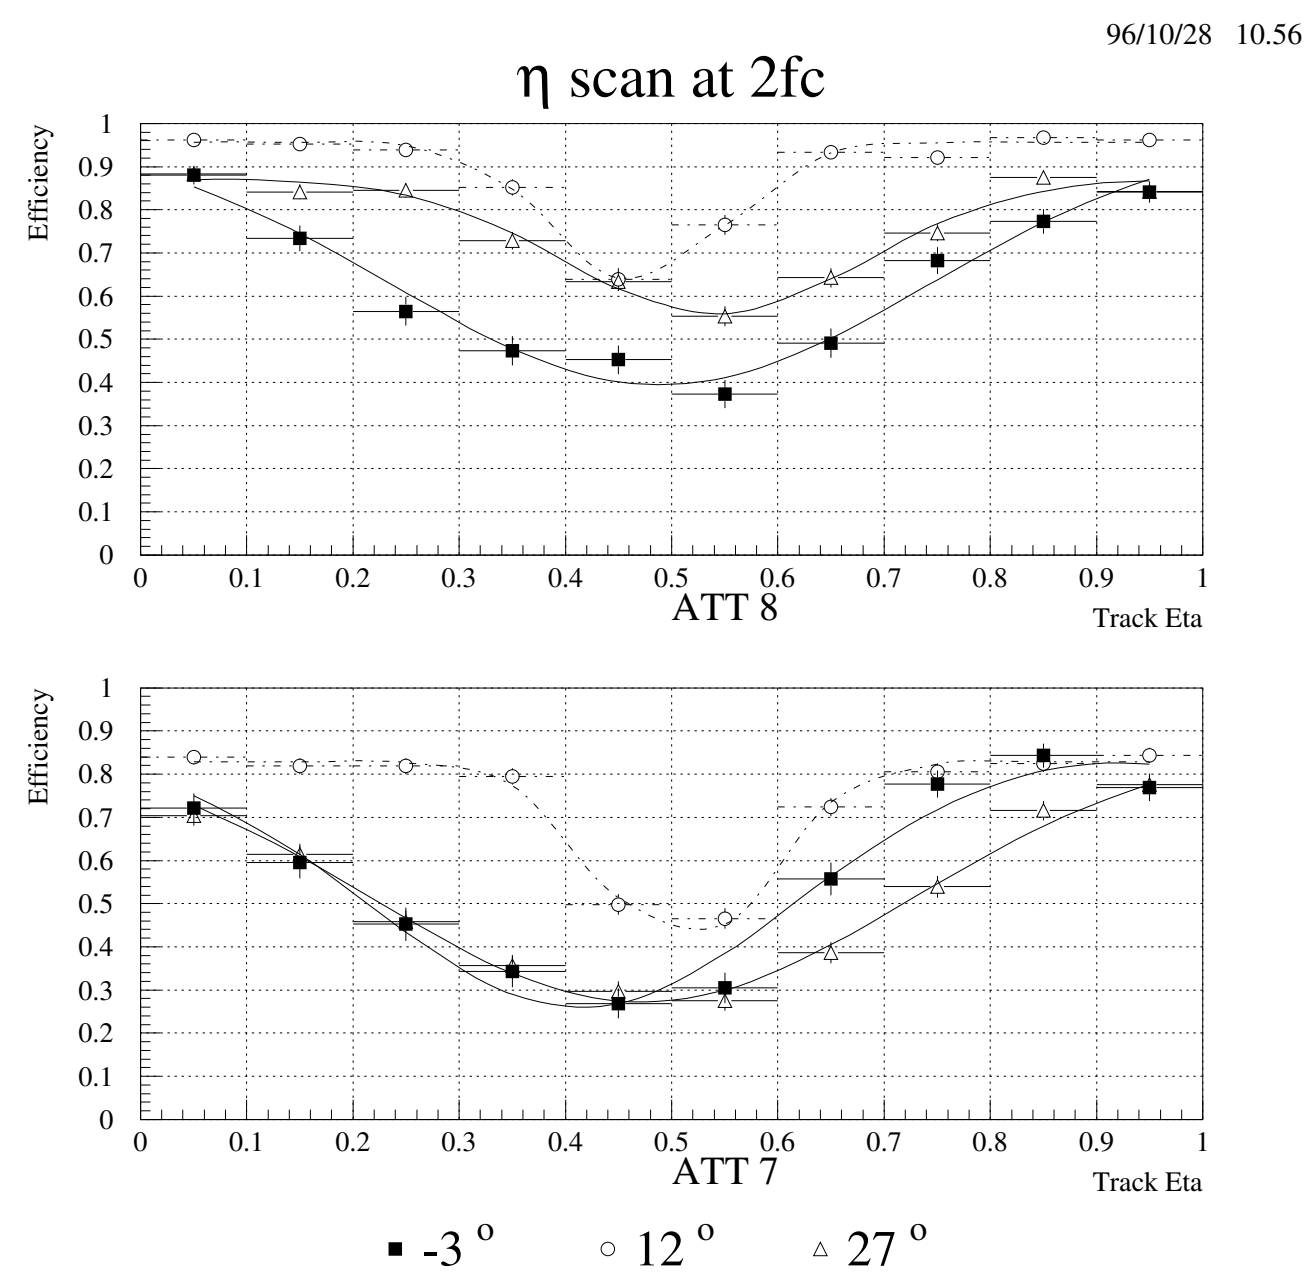

Fig. 7 Efficiency of ATT8 and ATT7 vs. the inter-strip position η for 2fC threshold.

Fig. 8 shows the efficiency averaged over η, for thresholds of 1.0fC for all rotation angles in the magnetic field. The efficiency is very high and uniform as a function of the rotation angle, and the only apparent reduction in efficiency is at -12 degree rotation . This angle is close to the rotation angle of 27 degrees relative to the Lorentz angle, where all tracks cross three or more strips. The fact that the irradiated module ATT7 has an 1% lower efficiency is an indication that the bias was not sufficient to deplete the detector and to guarantee full charge collection.

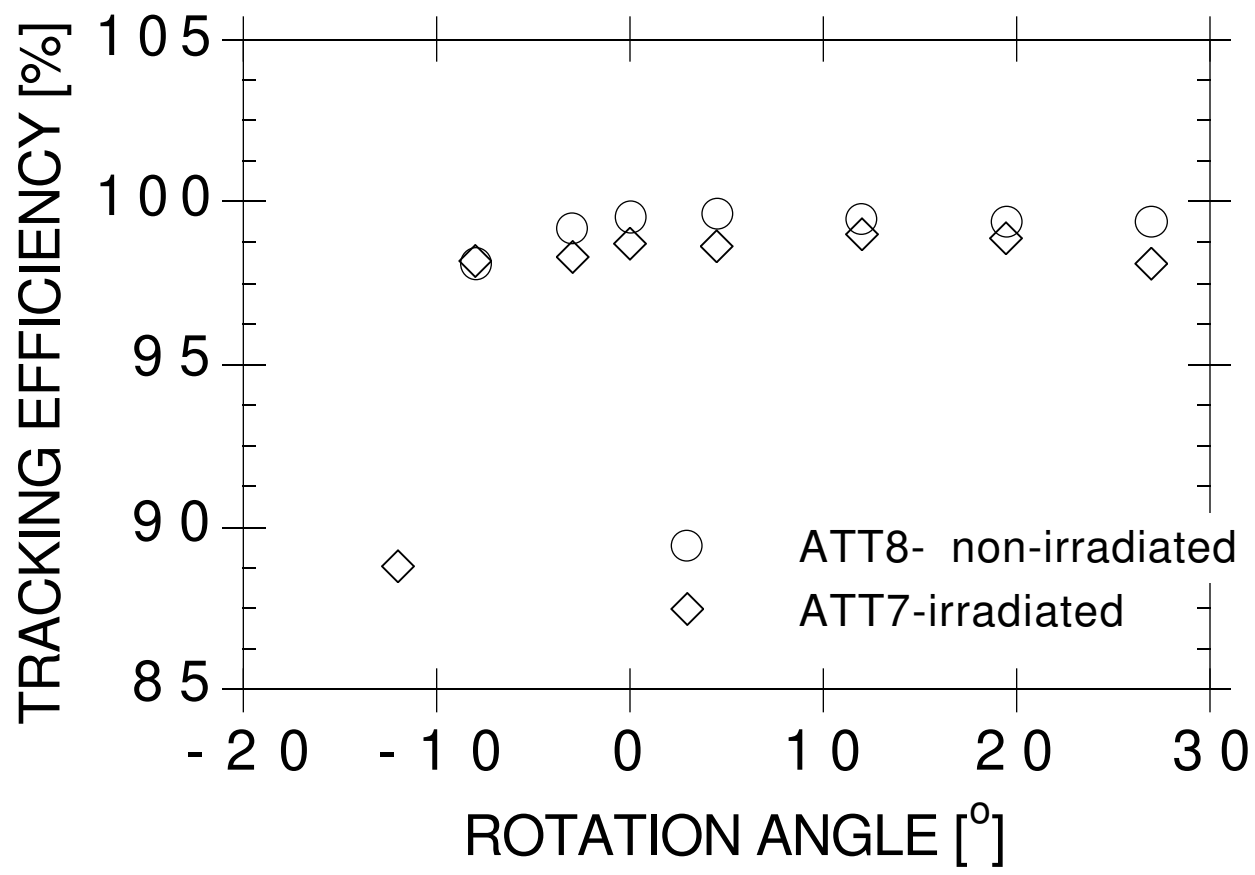

Fig. 8 Efficiency of ATT8 and ATT7 vs. angle for 1fC threshold.

D. Position Resolution

The position resolution shown in Fig. 9 is extracted from the residuals of found hits relative to extrapolated track positions.

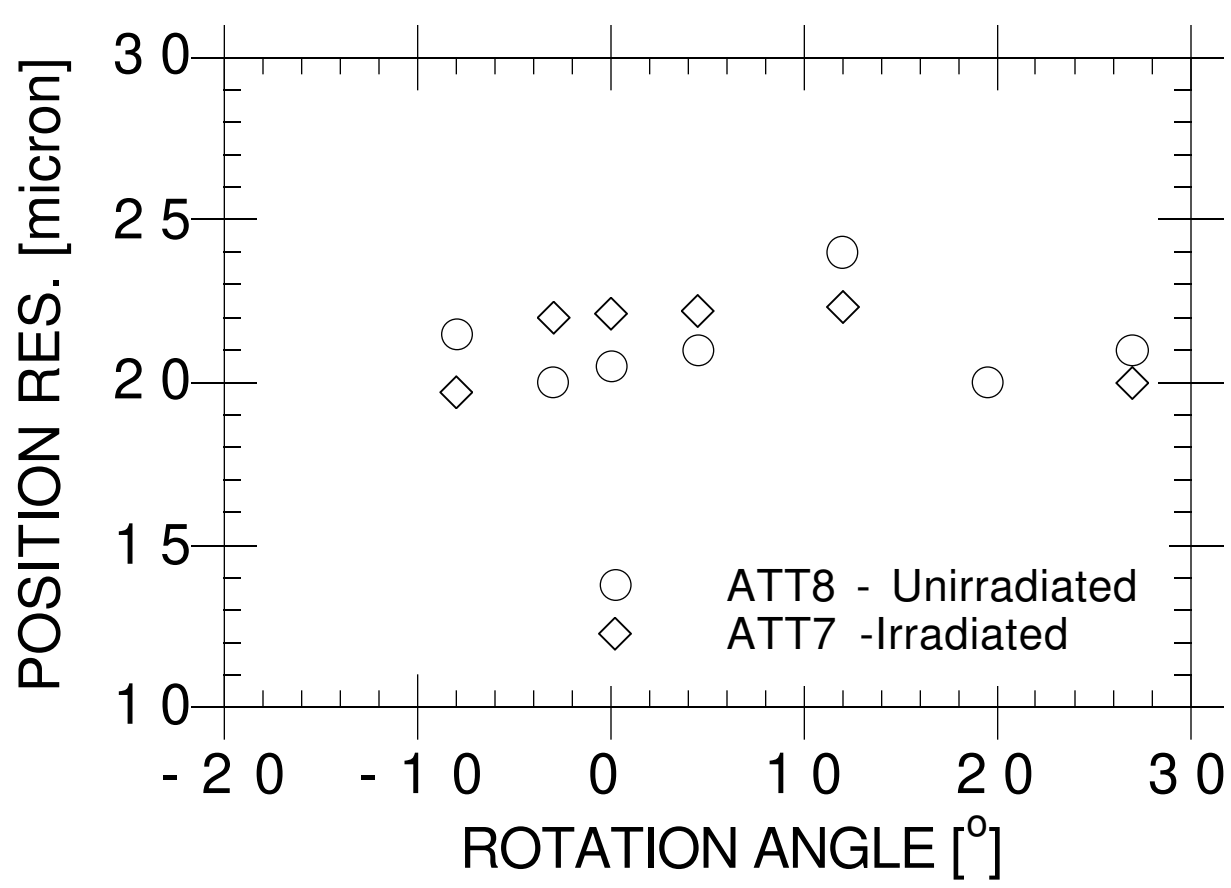

Fig. 9 Position resolution vs. angle at 1fC threshold

The distributions were fitted with a maximum likelihood function truncated at ±60µm to account for the non-gaussian ("square") resolution function of the binary readout. No dependence on the threshold setting is observed for thresholds>1fC. In Fig. 9, the resolution for 1.0fC threshold is independent of the rotation angle and amounts to about 20µm for the unirradiated module, and about 5-10% worse resolution for the irradiated module, which is within ATLAS specifications.

E. High Intensity Operation

During LHC operation, the ATLAS silicon tracker will experience an instantaneous counting rate of the order 10^6/cm^2/sec. In order to test the operation of the detectors and electronics under realistic LHC operating conditions, the H8 beam line rate was increased from $3x10^4$/cm^2/spill to $2.6x10^6$/cm^2/spill. This is close to the instantaneous rate expected at ATLAS and about 20% of the sustained rate. Both the DUT's and the anchor planes used electronics with fast shaping time and performed the tracking without difficulty. The efficiencies at 0.8 and 1fC threshold for both high and low intensity runs are shown in Fig. 10 for both modules at two rotation angles. Within the statistical errors, the efficiency is the same for high and low operation, for both the unirradiated and the irradiated module, indicating that the efficiency of the detectors does not depend on the rate.

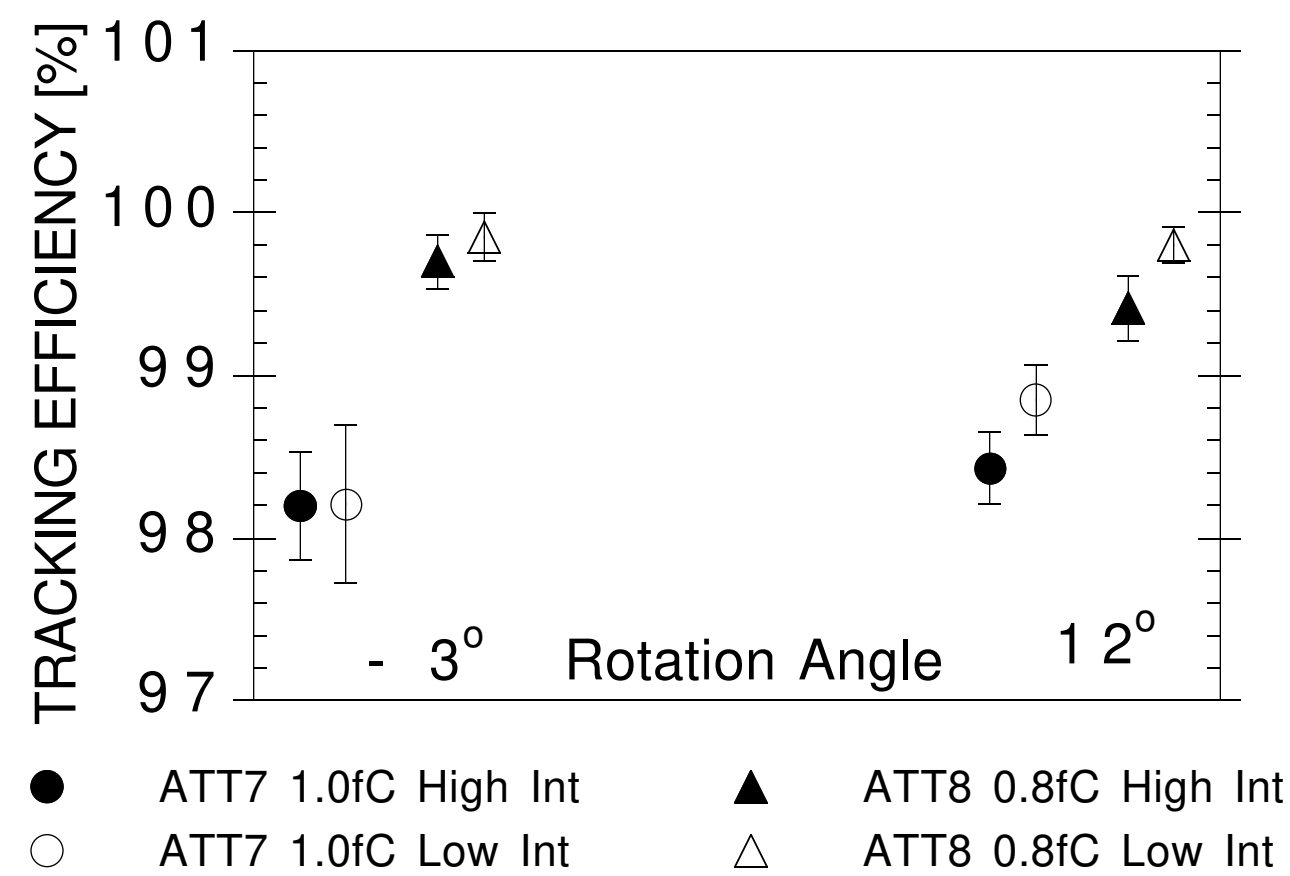

Fig. 10 Efficiency for both irradiated and unirradiated module during high and low intensity running for two rotation angles in the magnetic field.

V. CONCLUSIONS

A beam test of both irradiated and unirradiated silicon micro strip detectors with fast binary read out was performed in a magnetic field of 1.56T. Good efficiency at low occupancy was found when the detectors were rotated up to 15 degrees relative to the Lorentz angle. The position resolution was about 20µm for both detectors independent of the angle. The tracking efficiency was determined at beam intensities comparable to those predicted for ATLAS operation and was found to be the same as at low intensity.

VI. ACKNOWLEDGMENTS

This work was supported by the Australian Research Council, the US Dept. of Energy, the US-Japan Scientific Cooperation Program, and the UK Particle Physics and Research Council.

VII. REFERENCES

[1] ATLAS Technical Proposal, CERN/LHCC/94-43.

[2] ATLAS SCT, CERN/LHCC/94-38.

[3] D. Pitzl *et al*, Nucl. Instr. Methods **A311** (1992) 98.

[4] A. Ciocio *et al*, A binary readout system for silicon strip detectors at the LHC, Presentation at the LHC Electronics Workshop, Lisbon, Portugal, Sept 12, 1995.

[5] J. DeWitt *et al*, IEEE Trans. N.S. **42**, 445 (1995).

Y. Unno *et al,* IEEE Trans. N.S. **43**, 1175 (1996).

Y. Unno *et al,* Beam tests of a double-sided silicon strip detector with fast binary readout electronics before and after proton irradiation, 2nd Intern. Symp. on

Development and Application of Semiconductor Tracking Detectors, Hiroshima, Japan, Oct. 10-13, 1995, KEK 96-7.

[6] J. DeWitt et al, Beam test of silicon detectors with binary readout for ATLAS, submitted to 3rd PSD Conference, Manchester, UK, September 1996, SCIPP 96/12.

[7] Y. Unno et al, Beam test of a large area n-on-n silicon strip detector with fast binary readout electronics, IEEE N. S. Symp., Nov. 3-8, 1996, Anaheim, CA.

[8] E. Barberis *et al*, Nucl. Instr. Methods **A364** (1995) 507.

[9] H. F.-W. Sadrozinski, Tilt angle, crossing angle and Lorentz angle, SCIPP 96/48.

[10] P. Allport *et al*, ATLAS silicon strip beam test results, 2nd Intern. Symp. on Development and Application of Semiconductor Tracking Detectors, Hiroshima, Japan, Oct. 10-13, 1995.

[11] I. Kipnis, CAFE, A complementary bipolar analog front-end integrated circuit for the ATLAS SCT, unpublished.

[12] J. DeWitt, A pipeline and bus interface chip for silicon strip detector readout, IEEE N.S. Symp., San Francisco, CA, Nov. 1993, SCIPP 93/37.

[13] H. Ziock *et al*, Nucl. Instr. Methods **A342**, 96 (1994)

[14] H. F.-W. Sadrozinski, Depletion voltage and short-term annealing, SCIPP 96/57

[15] T. Dubbs *et al,* IEEE Trans. N.S. **43**, 1119(1996).

[16] T. Dubbs *et al.*, IEEE Trans. N.S. **43**, 1142(1996).

[17] E. Spencer *et al.*, IEEE Trans. N.S. **42**, 796(1995).